


IF IN DOUBT ASK

DO NOT SCALE

© COPYRIGHT RESERVED ET ENVIRONMENTAL LTD.

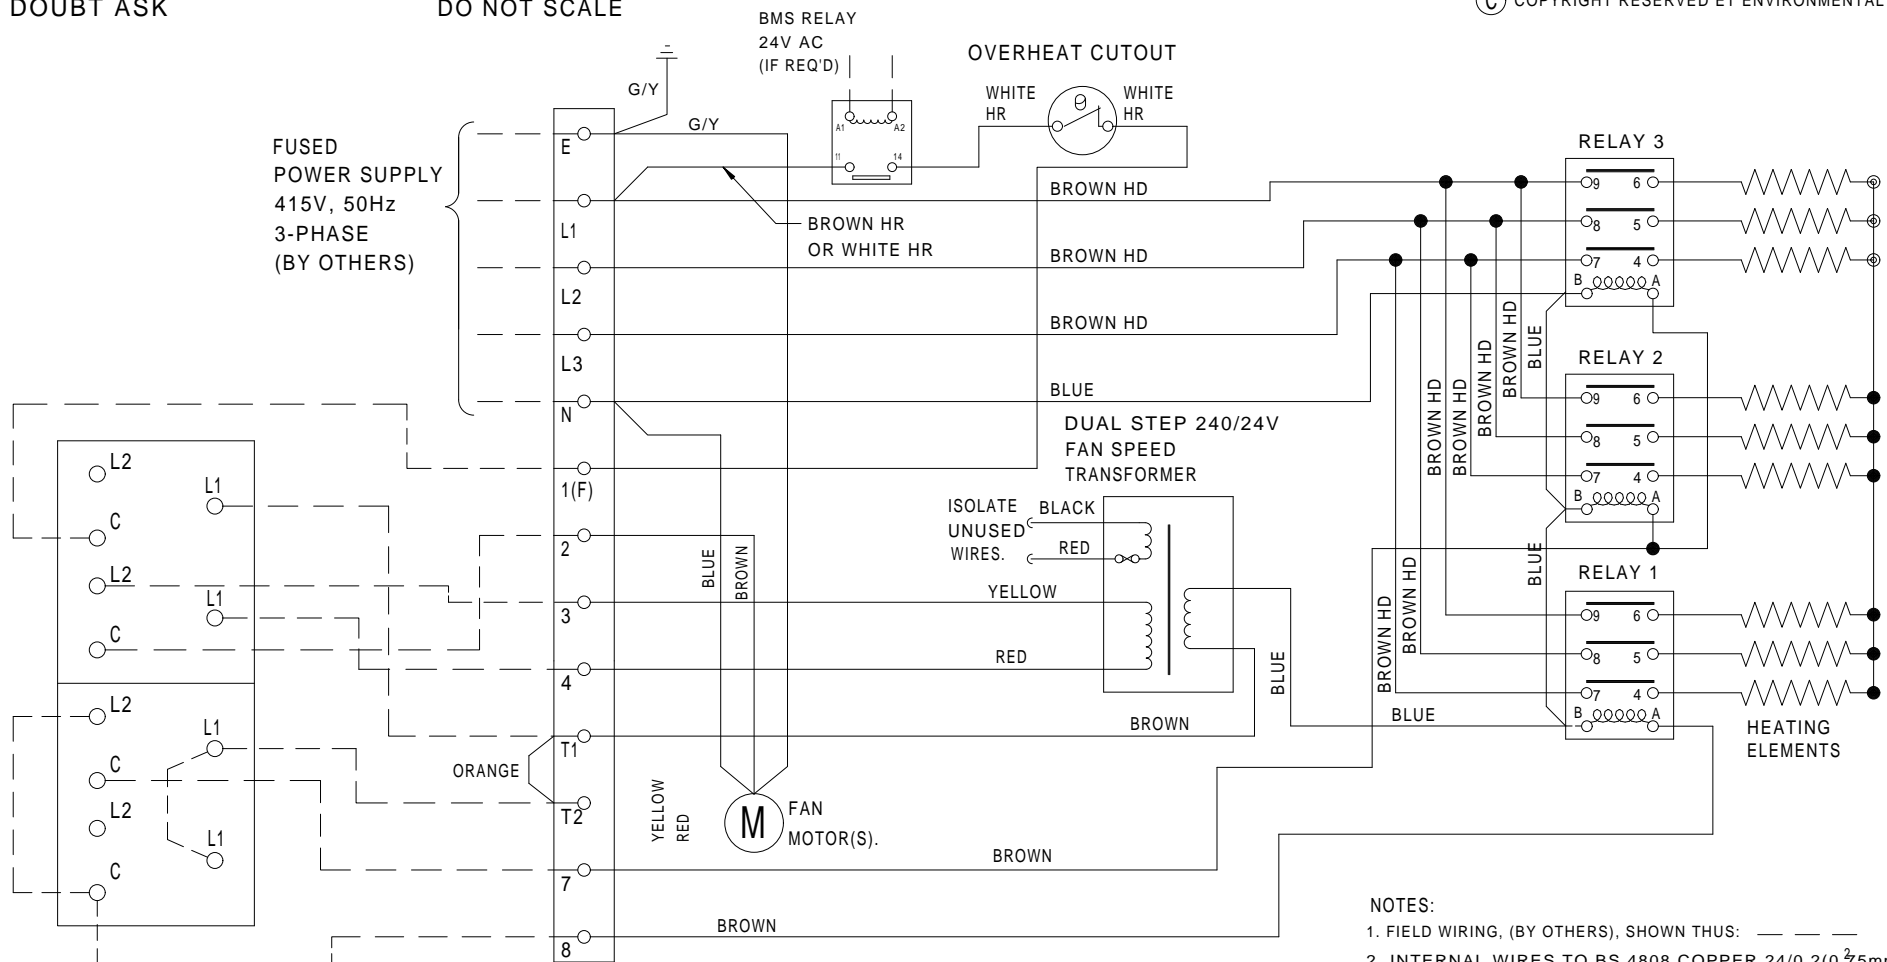

REMOTE
SATIN CHROME
SWITCH PLATE
ELEC 0423

NOTES:

1. FIELD WIRING, (BY OTHERS), SHOWN THUS: - - - -
2. INTERNAL WIRES TO BS.4808 COPPER 24/0.2(0.75mm)
3. G/Y - GREEN/YELLOW.
4. HR = HEAT RESISTANT WIRE. COPPER 1.3mm² WITH LAQ. GLASS BRAID OVERALL.
5. HD = HEAVY DUTY TO BS6231 COPPER 1.5mm²
6. T1 & T2 = REMOTE ROOM THERMOSTAT LOOP.
7. F = 5 AMP FUSE.

REV.	MOD.NO.	DATE	DRN	CHKD	DRAWING TO B.S. 308:PARTS 1,2 AND 3.		SCALE	DRAWN	AMC	DIFFUSION ENVIRONMENTAL LTD				
1	REQ.3831	15/02/05	AMC	CDS	WELDING TERMS AND SYMBOLS TO B.S. 499:PART 2.		MAT'L	DATE	15/02/05	47 Central Avenue, West Molesey, Surrey, KT8 2QZ Telephone 020-8783-0033. Fax 020-8783-0140				
MODIFICATION					GEOMETRIC TOLERANCE SYMBOLS		ALL DIMENSIONS IN MM THIRD ANGLE PROJECTION	FINISH	APP'D	DATE	TITLE WIRING DIAGRAM, ELECTRIC 3-PHASE. STANDARD REMOTE SPEED, WITH OVERHEAT CUTOUT.			
					CHARACTERISTIC	SYM							CHARACTERISTIC	SYM
					Straightness	—							Angularity	∠
					Flatness	∇							Run out	↗
Roundness	○	Position	⊕	TOLERANCES UNLESS OTHERWISE STATED		DIMENSIONAL ± 0,5	DATE	APP'D	DATE	OASIS ELECTRIC, 1000 UNIT = 9KW, 1500 UNIT = 12KW, 2000 UNIT = 18KW				
Cylindricity	∅	Concentricity	⊙	ANGULAR ± 1°										
Profile of a line	∩	Symmetry	≡											
Profile of a surface	∩	M.M.C.	Ⓜ											
Parallelism	//	Squareness	⊥								DRG.NO. A3/17862			